

TITLE 10G SFP+ RJ45 30m Transceivers	DOC No. RFD-20260723100-001	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.07.23	CLASSIFICATION : Optical Transceiver

1. PRODUCT FEATURES

- Up to 10Gbps bi-directional data links
- RJ45 Max 30m
- Fully metallic enclosure for low EMI
- Compact RJ-45 Connector assembly
- Hot-pluggable SFP footprint
- Low power dissipation
- Extended case temperature: 0°C to 70°C

2. APPLICATIONS

- RoHS compliant and Lead Free
- 10 Gigabit Ethernet

3. PRODUCT DESCRIPTION

The Copper Small Form pluggable (SFP) transceiver is based on SFP multi-sourcing agreement (MSA). It is compatible with the 10GBASE-T and 1000BASE-T standards as specified in IEEE Std 802.3. The 1000BASE-T physical layer IC(PHY) can be accessed via I2C, allowing access to LIMITED PHY settings and features.

PRODUCT NAME


10G SFP+ RJ45 30m Transceivers

JPC P/N	Distance	Media	Connector	Tem.
P60**RBRC001-1	30m	Cat. 6a/Cat. 7 Cable	RJ45	C

Note-1: ** Indicates the customer code.

TITLE 10G SFP+ RJ45 30m Transceivers	DOC No. RFD-20260723100-001	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.07.23	CLASSIFICATION : Optical Transceiver

3.1 DIMENSIONS, MATERIALS, PLATINGS AND MARKING

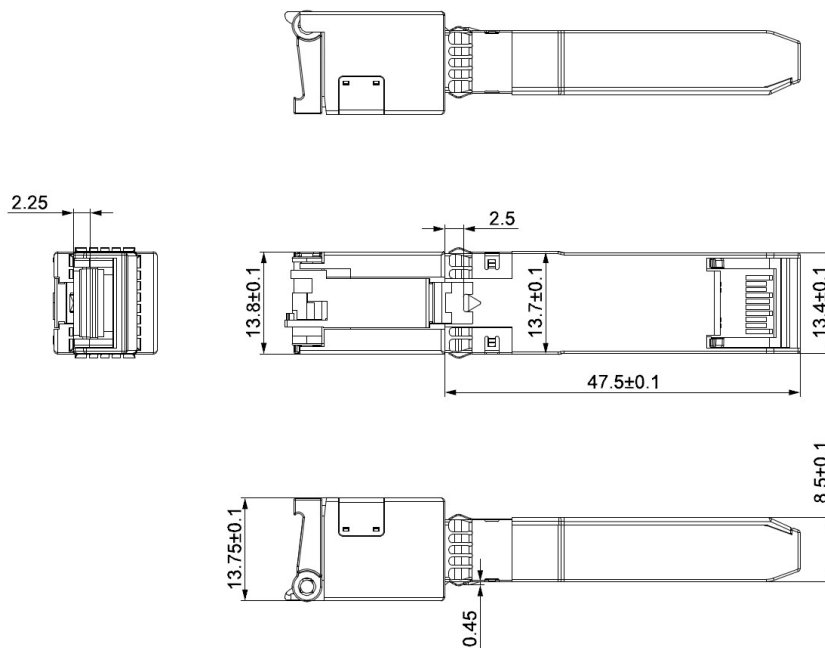

Unit is millimeter. All dimensions are ±0.1mm unless otherwise specified.

4. Absolute Maximum Ratings

The SFP has an input voltage range of 3.3V +/-5%, The 4 V maximum voltage is not allowed for continuous operation.

Parameter	Symbol	Min.	Typ	Max	Units	Notes/Conditions
Supply Current	Is			600	mA	1.2W max power over full range of voltage and temperature.see caution note below
Power Supply Voltage	Vcc	3.13	3.3	3.47	v	Referebced to GND
Maximum Voltage	Vmax			4	v	
Surge Current	Isurge			550	mA	Hot plug above steady state current,See caution note below

Caution:Power consumption and surge current are higher than the specified values in the SFP MSA

TITLE 10G SFP+ RJ45 30m Transceivers	DOC No. RFD-20260723100-001	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.07.23	CLASSIFICATION : Optical Transceiver

5. Low-Speed Signals

Parameter	Symbol	Min.	Max	Units	Notes/Conditions
SFP Output LOW	VOL	0	0.5	V	4.7k to 10k pull-up to host Vcc,measured at host side of connector
SFP Output HIGH	VOH	Host Vcc-0.5	Host Vcc+0.3	V	4.7k to 10k pull-up to host Vcc,measured at host side of connector
SFP Input LOW	VIL	0	0.8	V	4.7k to 10k pull-up to Vcc,measured at SFP side of connector
SFP Input HIGH	VIH	2	Vcc+0.3	V	4.7k to 10k pull-up to Vcc,measured at SFP side of connector

6. High-Speed Electrical Interface

ALL high-speed signals are AC-coupled internally

High-speed Electrical Interface Transmission Line-SFP

Parameter	Symbol	Min.	Typ	Max	Units	Notes/Conditions
Line Frequency	fL	10	125	1000	MHZ	5-level encoding,per IEEE 802.3
Tx Output Impedance	Zout,TX		100		Ohm	Differential,for all frequencies between 1MHz and 125MHz
Rx Input Impedance	Zin,RX		100		Ohm	Differential,for all frequencies between 1MHz and 125MHz

High-speed Electrical Interface,Host-SFP

Parameter	Symbol	Min.	Typ	Max	Units	Notes/Conditions
Single ended data input swing	Vinsing	180		700	mV	Single ended
Single ended data output swing	Voutsing	350		850	mV	Single ended
Rise/Fall Time	Tr,Tf		175		psec	20%-80%
Tx Input Impedance	Zin		50		Ohm	Single ended
Rx Output Impedance	Zout		50		Ohm	Single ended

TITLE 10G SFP+ RJ45 30m Transceivers	DOC No. RFD-20260723100-001	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.07.23	CLASSIFICATION : Optical Transceiver

7. General Specifications

Parameter	Symbol	Min.	Typ	Max	Units	Notes/Conditions
Data Rate	BR	10		10000	Mb/sec	IEEE 802.3 compatible.See Notes 2 through 4 below
Tx Output Impedance	L			100	m	Category 5 UTP.BER<10 ⁻¹²

Note:

- 1.Clock tolerance is +/- 50 ppm
- 2.By default,the is a full duplex device in preferred master mode
- 3Automatic crossover detection is enabled. External crossover cable is not required
4. Multi- BASE-T operation requires the host system to have an SGMII interface with no clocks, and the module PHY to be configured per Applications Note AN-2036.With a SERDES that does not support SGMII,the module will operate at single rate only.


8. Environmental Specifications

The SFP has an extended range from 0°C to +70°C case temperature as specified in Table.

Parameter	Symbol	Min.	Typ	Max	Units	Notes/Conditions
Operating Temperature	Top	0		70		Case temperature
Storage Temperature	Tsto	0		70		Ambient temperature

9. Applications Note:

Pin-out Definition

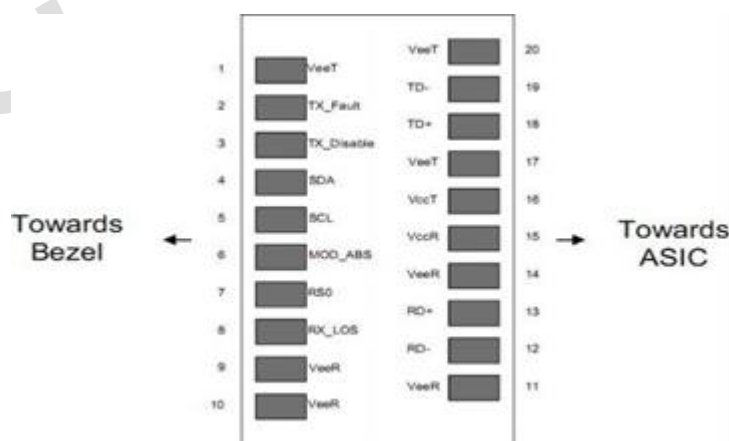

TITLE 10G SFP+ RJ45 30m Transceivers	DOC No. RFD-20260723100-001	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.07.23	CLASSIFICATION : Optical Transceiver

Pin Assignment

Pin	Symbol	Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	8.1
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	8.2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	8.3
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	8.3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	8.3
7	Rate Select	No connection required	
8	LOS	Grounded	8.4
9	VEER	Receiver Ground (Common with Transmitter Ground)	8.1
10	VEER	Receiver Ground (Common with Transmitter Ground)	8.1
11	VEER	Receiver Ground (Common with Transmitter Ground)	8.1
12	RD-	Receiver Inverted DATA out. AC Coupled.	
13	RD+	Receiver Non-inverted DATA out. AC Coupled.	
14	VEER	Receiver Ground (Common with Transmitter Ground)	8.1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	8.1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	8.1

Notes:

8.1 Circuit ground is connected to chassis ground.

8.2 PHY disabled on TDIS>2.0V or open, enabled on TDIS<0.8V.

8.3 Should be pulled up with 4.7k - 10k Ohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.

10. Serial Communication Protocol

supports the 2-wire serial communication protocol outlined in the SFP MSA.

The physical layer IC can also be accessed via the 2-wire serial bus at address Ach. For details interfacing

TITLE 10G SFP+ RJ45 30m Transceivers	DOC No. RFD-20260723100-001	
	REVISION : 01	AUTHORIZED BY : Hawk Rong
	DATE : 2026.07.23	CLASSIFICATION : Optical Transceiver

with the PHY IC, please contact support man or sales of C-Light.

Serial Bus Timing Requirements

Parameter	Symbol	Min.	Typ	Max	Units	Notes/Conditions
IC Clock Rate		0		100000	Hz	

11. Modification History

Rev.	Comments	Date	Originator	Approval
01	Initial	2026.07.23	Hawk Rong	Mike Sun