

TITLE 25G SFP28 BIDI 40km Transceiver	DOC No. RFD-20260617100-001	
	REVISION : 03	AUTHORIZED BY : Ray Wang
	DATE : 2026.10.01	CLASSIFICATION : Optical Transceiver

1. Product Features

- Operating data rate up to 25.78 Gbps
- Up to 40 km transmission distance
- High sensitivity PIN photodiode and TIA
- Rate Adaptation
- LC single connector
- Hot pluggable 20pin connector
- Low power consumption <1.5 W
- Single +3.3V±5% power supply
- Compliant with SFF-8472
- Fully RoHS Compliant
- Operating temperature range:
- Industrial: -40°C to +85°C

2. Product Applications

- 25GE BASE-LR Ethernet
- CPRI Option 10/eCPRI

3. Product Description

The Transceiver is intended for 40km reach service from 24.33Gb/s to 25.78Gb/s BI-direction single mode high-speed communications equipment where low-cost, extraordinary performance and reliability are essential. It consumes low power, operates base on 3.3V DC power supply and is offered in the industrial temperature range. They are compliant with SFP28 MSA, SFF-8431 and SFF-8432.

The low jitter and low bit error rate optical assembly features a DML laser transmitter and PIN/TIA receiver. It utilizes internal clock and data recovery (CDR) units on transmitter and the receiver chains for low jitter compliance. The differential AC coupled Tx and Rx data interfaces are CML compatible. The device is Class I laser safety compliant.

TITLE 25G SFP28 BIDI 40km Transceiver	DOC No. RFD-20260617100-001	
	REVISION : 03	AUTHORIZED BY : Ray Wang
	DATE : 2026.10.01	CLASSIFICATION : Optical Transceiver


3.1 Product Name and Series Number(s)

25G SFP28 BIDI T1270/R1330 & T1330/R1270 40km Transceivers

JPC P/N	Laser(nm)	Power	Sensitivity	Distance	Fiber Type	Connector	Tem.
P58**0CRII40-1	1270nm	-1~6dBm	-19dBm	40km	SMF	LC	I
P58**0CRIJ40-1	1330nm	-1~6dBm	-19dBm	40km	SMF	LC	I

Note-1 : ** Indicates the customer code.

3.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKING

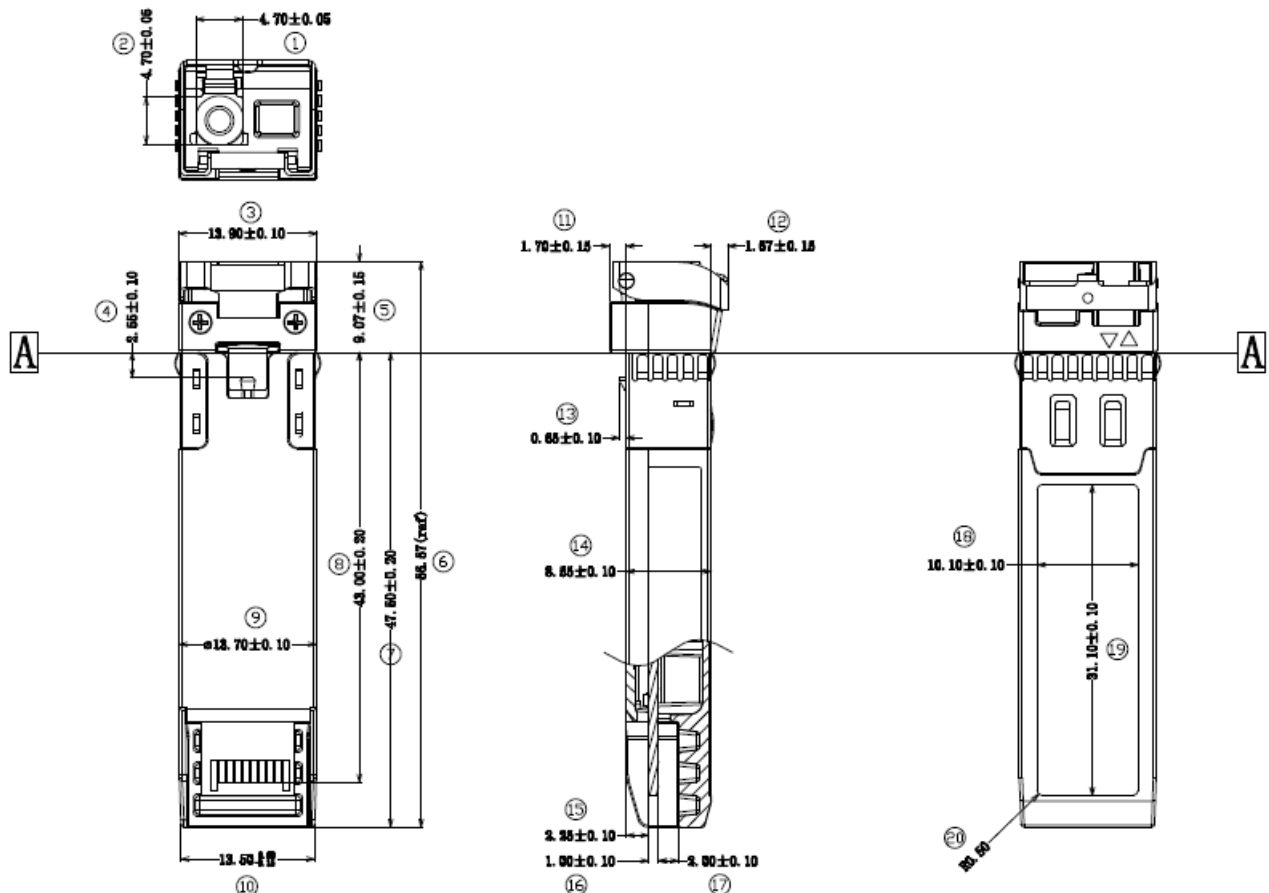

Unit is millimeter. All dimensions are ±0.1mm unless otherwise specified

TITLE 25G SFP28 BIDI 40km Transceiver	DOC No. RFD-20260617100-001	
	REVISION : 03	AUTHORIZED BY : Ray Wang
	DATE : 2026.10.01	CLASSIFICATION : Optical Transceiver

4. AbsoluteMaximum Ratings

Parameter	Symbol	Unit	Min	Max
Storage Temperature Range	Ts	°C	-40	85
Relative Humidity	RH	%	0	85

5. Recommended Operating Conditions

Parameter	Symbol	Unit	Min	Typ	Max
Operating Case Temperature Range	Tc	oC	-40		85
Power Supply Voltage	Vcc	V	3.14	3.3	3.46
Bit Rate	BR	Gb/s		25.78	
Bit Error Ratio	BER				5*10-5
Max Supported Link Length	L	Km			40

6. Electrical Characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Input Differential Impedance	RIN	Ω		100		
Single-ended Data Input Swing	VIN	mVp-p	90		450	
Transmit Disable Voltage	VDIS	V	2		VCCHOST	
Transmit Enable Voltage	VEN	V	VEE		VEE+0.8	
Transmit Fault Assert Voltage	VFA	V	2		VCCHOST	
Transmit Fault De-Assert Voltage	VFDA	V	VEE		VEE+0.4	
Receiver						
Single-ended Data Output Swing	VOD	mVp-p	200		450	
LOS Fault	VLOSFT	V	2		VCCHOST	
LOS Normal	VLOSNR	V	VEE		VEE+0.4	

TITLE 25G SFP28 BIDI 40km Transceiver	DOC No. RFD-20260617100-001	
	REVISION : 03	AUTHORIZED BY : Ray Wang
	DATE : 2026.10.01	CLASSIFICATION : Optical Transceiver

7. Optical Characteristics


Parameter	Symbol	Unit	Min	Typ	Max	Note
Transmitter						
Center Wavelength	λ	nm	1260	1270	1280	
	λ	nm	1320	1330	1340	
Average Output Power	Pav	dBm	-1		6	
Spectral Width (-20dB)	σ	nm			1	
Extinction Ratio	ER	dB	3.5			
Side Mode Suppression Ratio	SMSR	dB	30			
Average Launch Power of OFF Transmitter	POFF	dBm			-30	
Relative Intensity Noise	RIN	dB/Hz			-128	
Receiver						
Center Wavelength	λ_C	nm	1320	1330	1340	
Center Wavelength	λ_C	nm	1260	1270	1280	
Receiver Sensitivity(OMA)	RSENSE	dBm			-19	1
Receiver Overload (OMA)	Pmax	dBm	-5			
Receiver Reflectance		dB			-12	
LOS Assert	LOSA	dBm	-35			
LOS De-Assert LOS	LOSD	dBm			-21	
LOS Hysteresis		dB	0.5			

Note1: Measured at 25.78125Gb/s, ER>3.5dBm, PRBS 2³¹-1 and BER better than or equal to 5E-5;

TITLE 25G SFP28 BIDI 40km Transceiver	DOC No. RFD-20260617100-001	
	REVISION : 03	AUTHORIZED BY : Ray Wang
	DATE : 2026.10.01	CLASSIFICATION : Optical Transceiver

8. Applications Note:

Pin Definitions

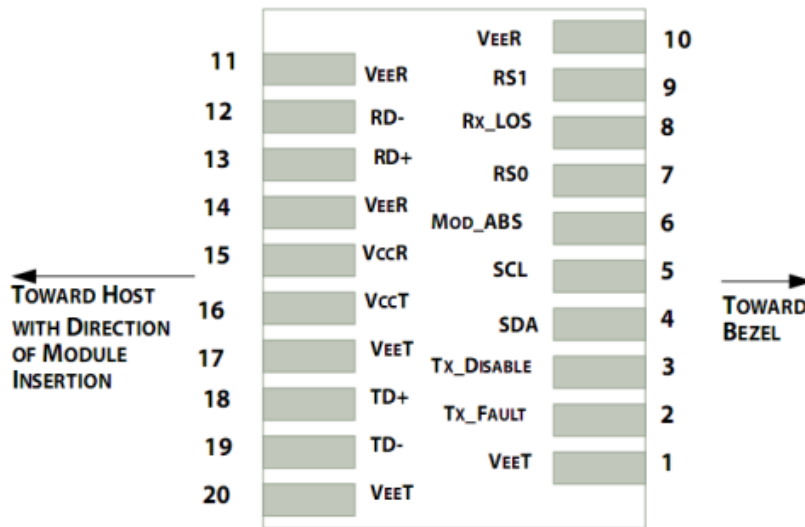


Pin Function Definitions

Pin Number	Symbol	Name	Description
1,17,20	VeeT	Transmitter Signal Ground	Connected to signal ground on the host board.
2	TX Fault	Transmitter Fault Out (OC)	Module transmitter fault output.
3	TX Disable	Transmitter Disable In (LVTTTL)	Module transmitter disable control.
4	SDA	Module Definition Identifiers	Serial ID with SFF 8472 Diagnostics Module Definition pins should be pulled up to Host Vcc with 10 kΩ resistors.
5	SCL		
6	MOD-ABS		
7	RS0	Receiver Rate Select (LVTTTL) Transmitter Rate Select (LVTTTL)	Rate select 0(Rx):Low=CDR Bypass ; High=CDR Select Rate select 1(Tx):Low=CDR Bypass ; High=CDR Select
9	RS1		
8	LOS	Loss of Signal Out (OC)	Receiver loss of signal.
10,11,14	VeeR	Receiver Signal Ground	Connected to signal ground on the host board.

TITLE 25G SFP28 BIDI 40km Transceiver	DOC No. RFD-20260617100-001	
	REVISION : 03	AUTHORIZED BY : Ray Wang
	DATE : 2026.10.01	CLASSIFICATION : Optical Transceiver

12	RD-	Receiver Negative DATA Out (CML)	Receiver inverted data output, internally AC coupled and terminated
13	RD+	Receiver Positive DATA Out (CML)	Receiver non-inverted data output, internally AC coupled and terminated.
15	VccR	Receiver Power Supply	Receiver Power 3.3V Supply.
16	VccT	Transmitter Power Supply	Transmitter Power 3.3V Supply.
18	TD+	Transmitter Positive DATA In (CML)	Transmitter non-inverted data input, internally AC coupled and terminated.
19	TD-	Transmitter Negative DATA In (CML)	Transmitter inverted data Input, internally AC coupled and terminated.

9. Recommended Interface Circuit

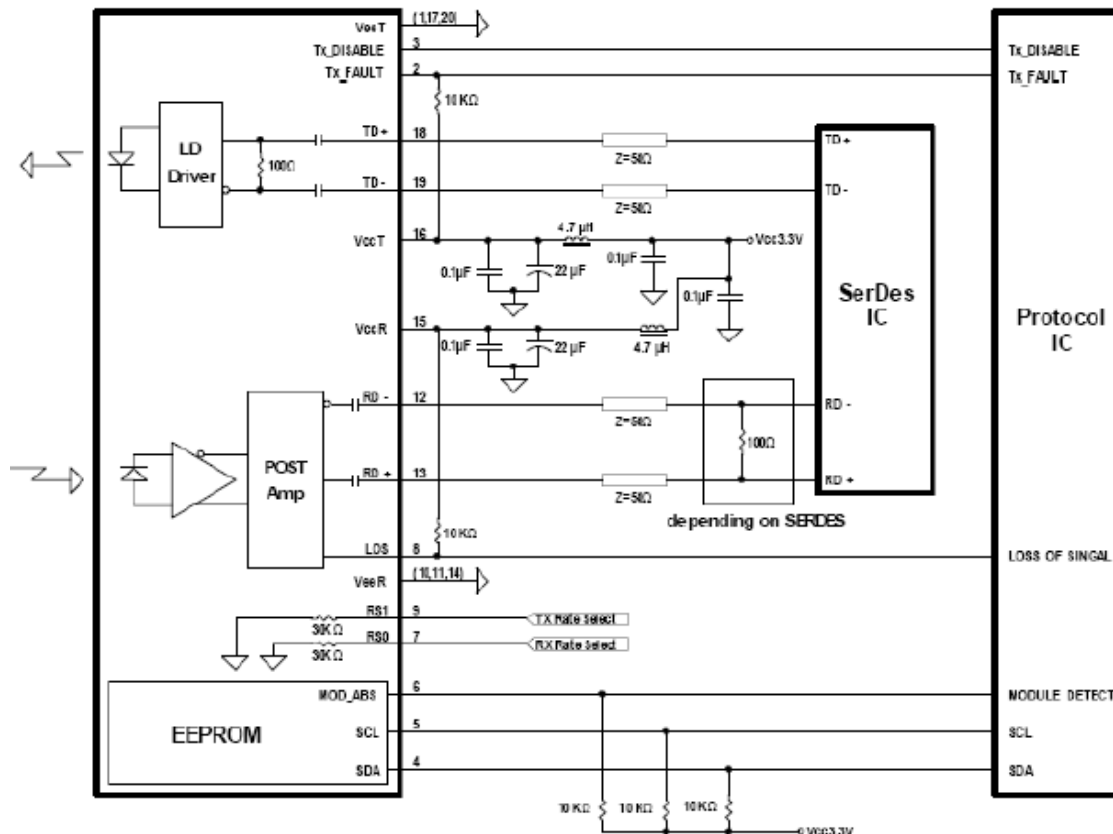

TITLE 25G SFP28 BIDI 40km Transceiver	DOC No. RFD-20260617100-001	
	REVISION : 03	AUTHORIZED BY : Ray Wang
	DATE : 2026.10.01	CLASSIFICATION : Optical Transceiver

10. Digital Diagnostics Functions

As defined by the SFF-8472, Our SFP28 transceivers provide digital diagnostic functions via a 2-wire serial interface, which allows real-time access to the following operating parameters:

- Transceiver temperature
- Laser bias current
- Transmitted optical power
- Received optical power
- Transceiver supply voltage

It also provides a sophisticated system of alarm and warning flags, which may be used to alert end-users when particular operating parameters are outside of a factory-set normal range. The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through the 2-wire serial interface. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. The 2-wire serial interface provides sequential or random access to the 8 bit parameters, addressed from 0x00h to the maximum address of the memory. For more detailed information, including memory map definitions, please refer the SFF-8472 documentation.

11. Digital Diagnostic Monitor Accuracy

The following characteristics are defined over recommended operating conditions

Parameter	Accuracy	Unit
Internally measured transceiver temperature	+/-3	deg.C
Internally measured transceiver supply voltage	+/-3	%
Measured Tx bias current	+/-10	%
Measured Tx output power	+/-3	dB
Measured Rx received average optical power	+/-3	dB

TITLE 25G SFP28 BIDI 40km Transceiver	DOC No. RFD-20260617100-001	
	REVISION : 03	AUTHORIZED BY : Ray Wang
	DATE : 2026.10.01	CLASSIFICATION : Optical Transceiver

12. Modification History

Rev.	Comments	Date	Originator	Approval
01	Initial	2025.08.08	Andy Yang	Mike Sun
02	Modify Power & Sensitivity	2026.06.17	Hawk Rong	Mike Sun
03	Updated Version	2026.10.01	Ray Wang	Mike Sun