
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JPC connectivity Inc.(JPC)

CUSTOMER DRAWING

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		INITIAL DESIGN	YANG	DENG	25/06/2026
02					
03					

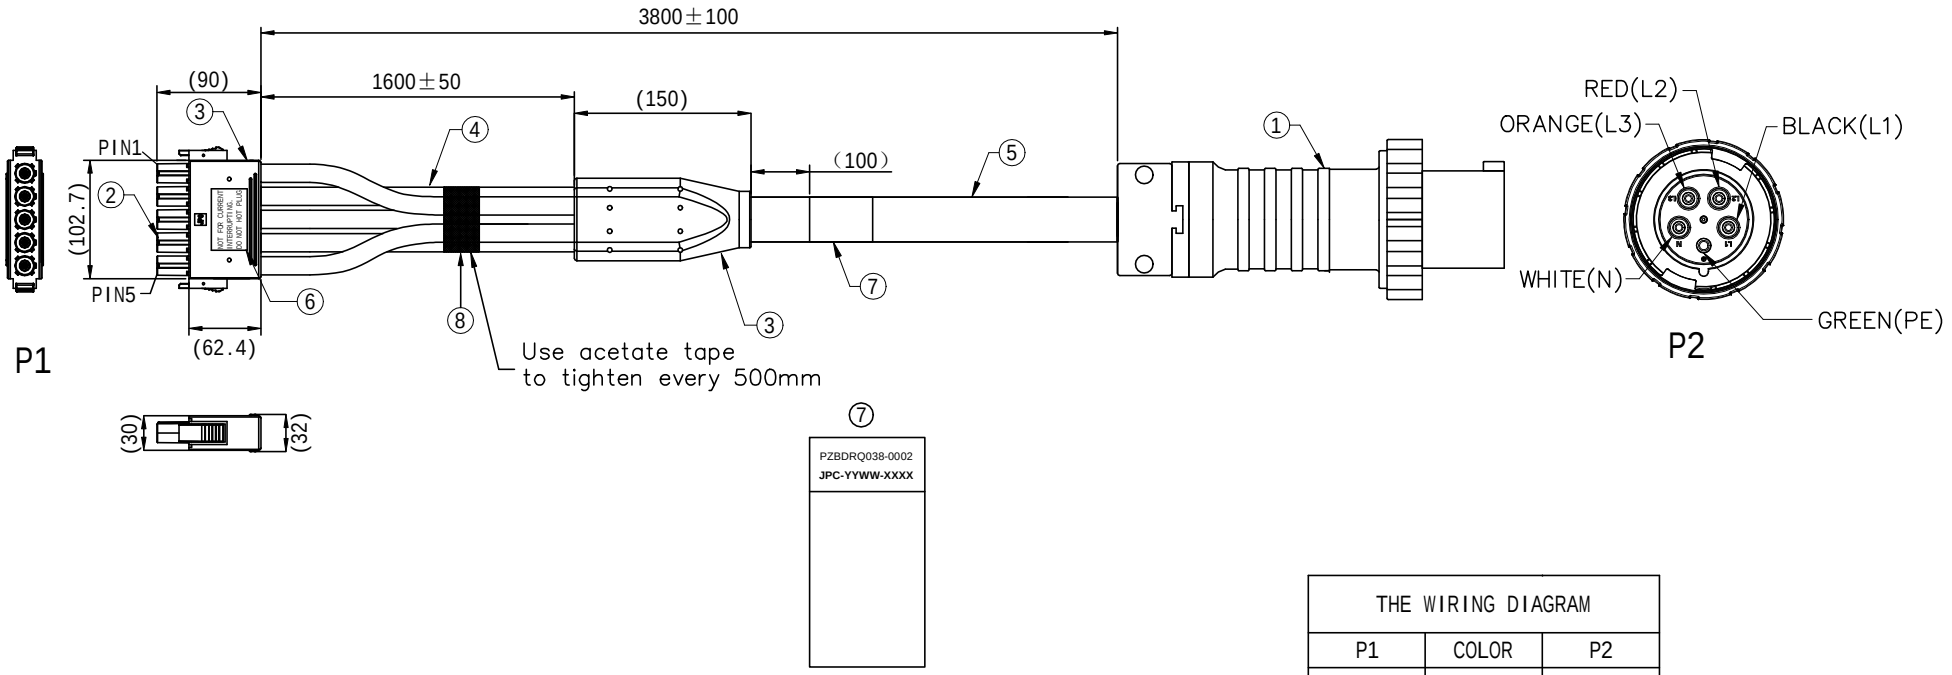

THE WIRING DIAGRAM		
P1	COLOR	P2
PIN1	BLACK	L1
PIN2	RED	L2
PIN3	GREEN	PE
PIN4	ORANGE	L3
PIN5	WHITE	N

ITEM	SUPL	SUPL PN	DESCRIPTION	Q'TY
8	/	/	ACETATE TAPE, W=30mm, BLACK	1 PCS
7	/	/	LABEL WHITE	1 PCS
6	/	/	LABEL YELLOW	2 PCS
5	/	/	TYPE-W,5×3AWG CABLE,90℃,□D=37.6MM,BLACK JACKET	A/R
4	/	/	TYPE-W,1×3AWG CABLE,90℃,□D=15.8MM,BLACK JACKET	A/R
3	/	/	THERMOPLASTIC BLACK	A/R
2	/	/	5PIN FEMALE CONNECTOR	1 PCS
1	/	/	IEC 60309 4P5W 6H PLUG 2CMA100597R1000 AMPHENOL	1 PCS

RoHS COMPLIANT

Unit:mm(inch)

GENERAL TOLERANCES: (UNLESS SPECIFIED)
0 =±1 (0.039)
0.0 =±.5 (0.02)
0.00 =±.3 (0.012)
0.000=±.15(0.006)
0° =± 2'
0.0° =± 1'

PROJECTION

D.R.

CH.K

APV.D

JPC connectivity Inc.

TITLE: 130A 5Pin Female Connector to 100A IEC60309 4P5W 6H Plug Cable, L=3800mm

PD./FILE NO.: XXXXXXXXX

X-XXXX

SCALE: N.T.S. | SIZE: A4 | PART NO.: PZBDRQ038-0002

REV. 01

SHEET 1 OF 1